


**TIPO A.T o A.M**

Ø FUNE m/m		9	12	15	18	21	24	27	30	36	42	48	54	60	66	72	
PORTATA KG	ANIMA TESSILE	I	930	1640	2590	4200	5250	6800	8700	11600	16800	22950	30000	38000	47000	56600	67600
		U	1860	3280	5180	8400	10500	13600	17400	23200	33600	45900	60000	76000	94000	113200	135000
		△ 60°	1630	2870	4530	7350	9100	11700	15100	20300	29400	40160	52320	66320	82250	99100	118300
		△ 90°	1300	2300	3620	5880	7430	9600	12300	16240	23520	32160	42000	53100	65800	79250	94640

COEFFICIENTE DI UTILIZZAZIONE = 5:1


## TIPO GS

FUNE DIAMETRO mm	PORTATA IN VERTICALE Kg
10	800
12	1.100
14	1.600
16	2.000
18	2.550
20	3.000
22	3.800

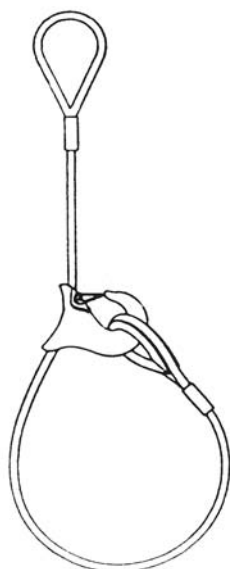

## TIPO 2B - 2GS

PORTATA fino a 90° G.C.S.	DIAMETRO DELLA FUNE FC	LUNGHEZZA MINIMA L
1.100	10	1.000
1.550	12	1.200
2.200	14	1.400
2.800	16	1.600
3.500	18	1.800
4.200	20	2.000
5.300	22	2.200
6.400	24	2.400

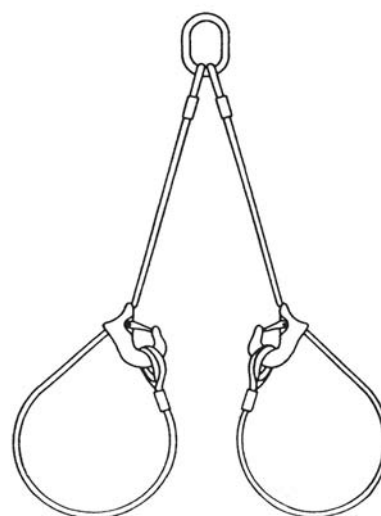

COEFFICIENTE DI UTILIZZAZIONE = 5:1